

**Series 24 - Navigation Lights with tell-tale indicator**

**Application**

Application depending on visibilities.  
See table in technical information.

**Housing**

Housing with stainless steel, non-corrosive, seawater resistant.


**Optics**

Plastic, seawater resistant; visibility 2 nm

**Electric**


2 wire lead

1




mm/inch

2




mm/inch

3



mm/inch

4

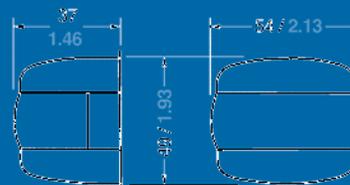




mm/inch

5



Incorporated waterproof switch automatically turns light off when closed.





mm/inch

**Bulb included**

		Description	Wattage	Visibility	Housing color	12 V
<b>1</b>		starboard	10 W	1 nm	stainless steel	24225
		port	10 W	1 nm	stainless steel	24325
		bicolor	10 W	1 nm	stainless steel	24125
<b>2</b>		starboard	10 W	2 nm	stainless steel	24205
		port	10 W	2 nm	stainless steel	24305
		bicolor	10 W	2 nm	stainless steel	24105
<b>3</b>		bicolor, tell tale	10 W	2 nm	stainless steel	24107
<b>4</b>		starboard	10 W	2 nm	stainless steel	24202
		port	10 W	2 nm	stainless steel	24302
<b>5</b>		bicolor	10 W	2 nm	stainless steel	24600
		bicolor tilt	10 W	2 nm	stainless steel	24602