

USCG


IMO

BSH

CE


 $\frac{12\text{ V}}{24\text{ V}}$

BAY 15d



25 W

Series 42 - Modern design Navigation lights, semi recessed.

Application

Application depending on visibilities.
See table in technical information.

Housing

Polycarbonate white, shock resistant,
non-corrosive, non-magnetic, seawater
resistant.

Optics

(Fresnel) plastic, shock resistant,
seawater resistant, easy to change;
range of visibility 2 nm.

Protection

IP 55


Electric

2 wire

Mounting

Flush mount, see drawing.

1

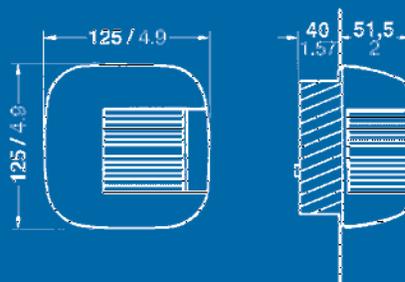

mm/inch

		Bulb included				
	Description	Vessels	Visibility	Housing color	12 V 25 W	24 V 25 W
1	 starboard	< 50 m	2 nm	white	42201	42221
	 port	< 50 m	2 nm	white	42301	42321
	 stern	< 50 m	2 nm	white	42501	42521

Spare Parts

