

FEATURES

- ▼ 70 and 100w High Pressure Sodium.
- ▼ Low profile mounting with junction box to the side of the luminaire.
- ▼ Adjustable mounting brackets allow flexible mounting including in cornice applications.
- ▼ Tool less entry via four stainless steel positive locking latches with a one-piece high temperature silicone gasket provide a watertight seal.
- ▼ HID luminaires supplied with versatile multi-tapped 120/208/240/277V 60 Hz ballast as standard.
- ▼ Field replaceable lens and gasket.
- ▼ 5 year warranty.

APPROVALS

- ▼ UL 844
 Class I Division 2 Groups A, B, C & D
 Class I Zone 2 Groups IIA, IIB, IIB + H2 and IIC
- ▼ UL 1598A - Marine Outside Type Saltwater
- ▼ Conforms to IP 66

APPLICATIONS


- ▼ Class I Division 2 hazardous locations
- ▼ Marine and wet environments
- ▼ Low Profile Requirements
- ▼ Cargo Hold Areas
- ▼ Parking Garages

OPTIONS

To obtain a luminaire with any of the options listed below, please add the following suffix to the part number (not all options can be combined):

- ▼ 480V 60Hz -486

DIMENSIONS

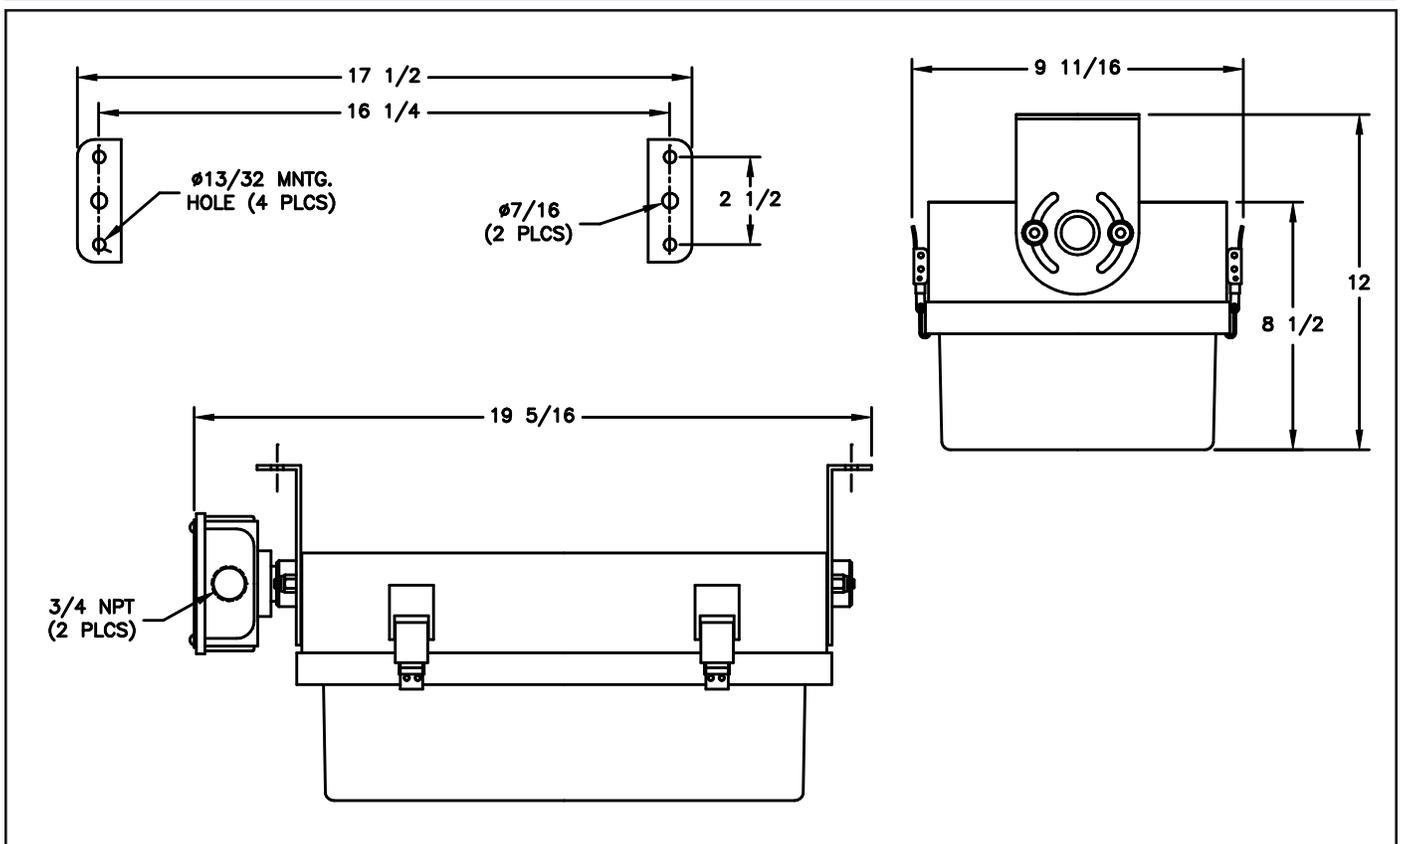



LUMINAIRE TECHNICAL SPECIFICATIONS

HOUSING

Type 316 stainless steel finish with a natural finish or stainless steel with a white oven cured polyester powder coat protective, both with stainless steel mounting fittings.

LATCHES

Stainless steel latches for all types.

OUTLETS

All units can be supplied with a wide range of sizes and number of outlets.

LENS

High impact and heat resistant, clear polycarbonate lens with a stainless steel retaining hook for hands-free lamp replacement.

BALLAST

A multi-tapped ballast offering 120/208/240/277v AC 60Hz versatility is standard. 480v AC 60Hz is available as an option.

LAMP TYPE

Available in mogul base high pressure sodium which operates to -40° F.

GASKET

A one-piece high temperature silicone gasket provides a watertight seal between the lens frame and housing. Gasket is field replaceable.

ORDERING REFERENCES

HID LUMINAIRES

70w Stainless Steel Housing with Stainless Steel Mounting Feet	ZLXSCRS10MT
100w Stainless Steel Housing with Stainless Steel Mounting Feet	ZLXSCRS7MT
70w Stainless Steel Housing with Aluminum Mounting Feet	ZLXSCRA10MT
100w Stainless Steel Housing with Aluminum Mounting Feet	ZLXSCRA7MT

SPARE PARTS

LAMPS		LENS	INX2186TEX
70W HPS	INX3662	GASKET	GKT6089-42
100W HPS	INX3535	LAMP HOLDERS	INX4100
BALLAST			
70W HPS MULTI-TAP	INX5116		
70W 480V 60HZ	INX5234		
100W HPS MULTI-TAP	INX5014		
100W 480V 60HZ	INX5056		